



Introducing BESAW GSI's Bucket Elevator Swing-Away Auger!

Available in standard and low profile models*, these augers feature single screw side adjustment motor mounts for easy belt adjustment and capacities from 1500 to 8000 bushels per hour.

* 10" and 12" only



BESAW Conveyor Features...

- A single screw, side adjustment motor mount makes belt adjustment EASY!
- Standard length tube to match GSI bucket elevators.
- Optional transitions available to mount BESAW to the bucket elevator. A convenient option not available from most other manufacturers.
- Powder paint coated parts for extended durability and a quality finish.

BESAW "Low-Profile" Augers* also Feature...

- A 10-1/2" height which fits under low hopper-bottom grain trailers.
- Self-leveling — pivot point keeps the hopper flat on the ground at all auger elevations.
- Large Hopper — 40" x 54" intake area.
- Maximum capacity — dual intake flighting. * 10" and 12" only

Dura-Edge® Flighting...


All BESAW (Bucket Elevator Swing-Away Augers) feature GSI's exclusive Dura-Edge® flighting for longer equipment life!

Every farmer knows from experience that auger flighting wears out on the outside edges first. That's why GSI invested in exclusive patented technology to produce Dura-Edge®.

The outside edge on Dura-Edge® 7 gauge and 1/4" flighting is 30% thicker than traditional flighting. That's 30% more usage over the life of the product. You won't find Dura-Edge® anywhere else than GSI and it comes standard at no additional charge.



BESAW Specifications...

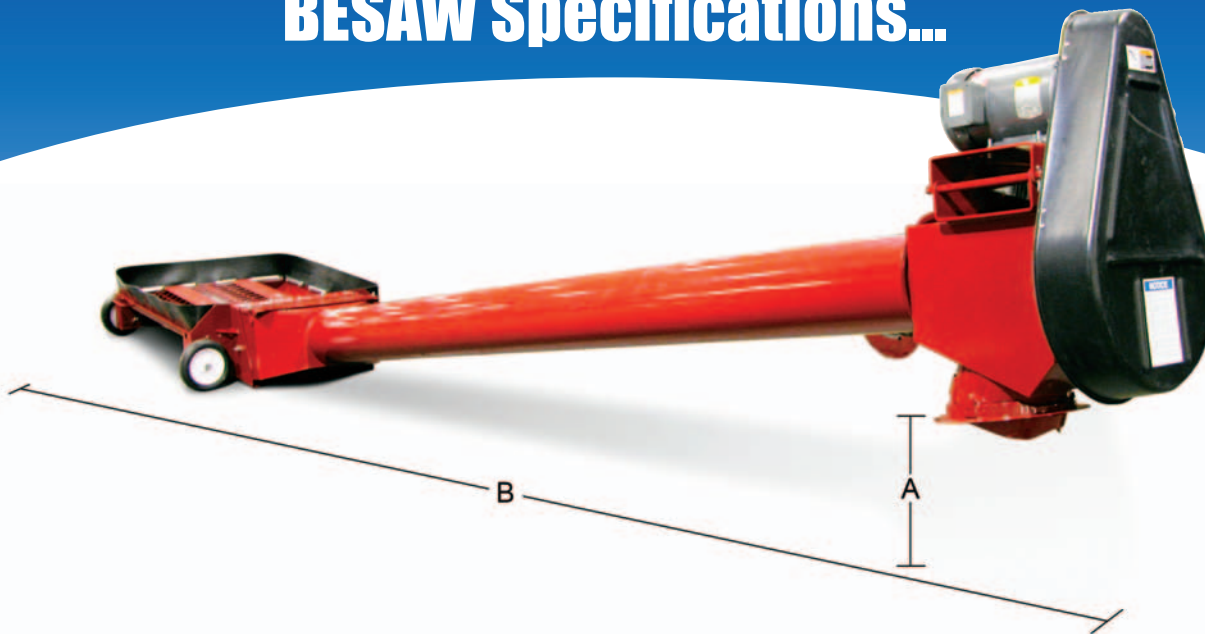

Model Number	Capacity BPH	Tube Diameter	Hopper Opening Size	Max. Disch. Height - A	Over All Length - B	HP Required	Weight
--------------	--------------	---------------	---------------------	------------------------	---------------------	-------------	--------

8" BESAW - Bucket Elevator Swing Away Hopper

SA08S1215A	1500						
SA08S1220A	2000	8"	33.5" x 48"	53 5/8"	204 1/4"	3 HP	471 LBS
SA08S1225A	2500						
SA08S1230A	3000						

10" BESAW - Bucket Elevator Swing Away Hopper

SA10S1440A	4000						
SA10S1450A	4500	10"	33.5" x 48"	59 3/8"	222 1/8"	5 HP	582 LBS
SA10S1456A	5600						

10" BESAW - Bucket Elevator Swing Away Low-Profile Hopper

SA10S1315A	4000						
SA10S1320A	4500	10"	40" x 56"	59 1/4"	221 3/4"	5 HP	762 LBS
SA10S1325A	5600						

12" BESAW - Bucket Elevator Swing Away Hopper

SA12S1570A	7000						
SA12S1580A	8000	12"	33.5" x 54"	68"	250 3/8"	7.5 HP	916 LBS

12" BESAW - Bucket Elevator Swing Away Low-Profile Hopper

SA12S1470A	7000						
SA12S1480A	8000	12"	40" x 55"	68"	249 1/4"	7.5 HP	1026 LBS

Due to continual improvement, GSI designs and specifications are subject to change without notice.

Your complete systems manufacturer.

Grain Systems

1004 E. Illinois Street • Assumption, Illinois 62510
 Ph: 217-226-4421 • Fax: 800-800-5329
 Int'l Tel: 1-217-226-4401 • Int'l Fax: 1-217-226-3404
 www.grainsystems.com • e-mail: gsisales@grainsystems.com



a division of
THE GSI GROUP



February 2005 **GS-20**